

# Lecture

## Sensor Technology

### EE 565: Position, Navigation and Timing

Lecture Notes Update on March 3, 2020

Aly El-Osery and Kevin Wedeward, Electrical Engineering Dept., New Mexico Tech



In collaboration with

Stephen Bruder, Electrical & Computer Engineering, Embry-Riddle Aeronautical University

.1


#### Terminology

- **Accuracy:** Proximity of the measurement to the true value
- **Precision:** The consistency with which a measurement can be obtained
- **Resolution:** The magnitude of the smallest detectable change
- **Sensitivity:** The ratio between the change in the output signal to a small change in input physical signal. Slope of the input-output fit line.
- **Linearity:** the deviation of the output from a “best” straight line fit for a given range of the sensor



.2

## Accuracy vs Precision

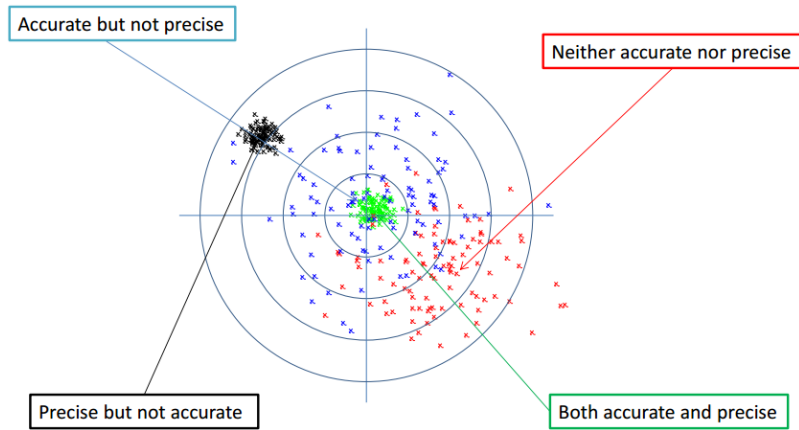

.3

## Inertial Sensors — Bias Errors

- Bias — often the most critical error
  - Fixed Bias  $b_{FB}$ 
    - \* Deterministic in nature and can be addressed by calibration
    - \* Often modeled as a function of temperature
  - Bias Stability  $b_{BS}$ 
    - \* Varies from run-to-run as a random constant
  - Bias Instability  $b_{BI}$ 
    - \* In-run bias drift — typically modeled as random walk

## Bias Errors

$$\Delta f = b_{a,FB} + b_{a,BI} + b_{a,BS} = b_a$$

$$\Delta \omega = b_{g,FB} + b_{g,BI} + b_{g,BS} = b_g$$

.4


## Inertial Sensors — Scale Factor Errors

- Fixed scale factor error
  - Deterministic in nature and can be addressed by calibration
  - Often modeled as a function of temperature
- Scale Factor Stability  $s_a$  (accel) or  $s_g$  (gyro)
  - Varies from run-to-run as a random constant
  - Typically given in parts-per-million (ppm)

## Scale Factor Errors

$$\Delta f = s_a f, \quad \Delta \omega = s_g \omega$$

The scale factor represents a linear approximation to the steady-state sensor response over a given input range — True sensor response may have some non-linear characteristics



.5

### Inertial Sensors — Misalignment


- Refers to the angular difference between the ideal sense axis alignment and true sense axis vector
  - a deterministic quantity typically given in milliradians

$$\Delta f_z = m_{a,zx} f_x + m_{a,zy} f_y$$

$$\Delta \omega_z = m_{g,zx} \omega_x + m_{g,zy} \omega_y$$

- Combining misalignment & scale factor

$$\Delta \vec{f} = \begin{bmatrix} s_{a,x} & m_{a,xy} & m_{a,xz} \\ m_{a,yx} & s_{a,y} & m_{a,yz} \\ m_{a,zx} & m_{a,zy} & s_{a,z} \end{bmatrix} \begin{bmatrix} f_x \\ f_y \\ f_z \end{bmatrix} = M_a \vec{f}_{ib}$$

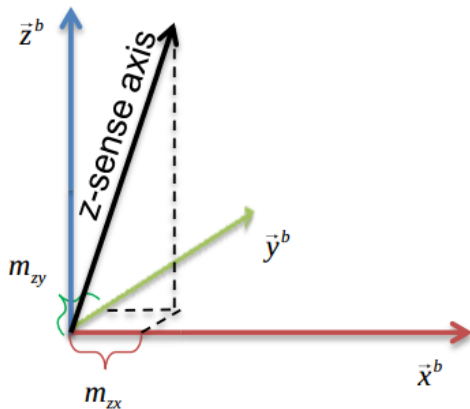

.6

### Inertial Sensors — Cross-Axis Response

- Refers to the sensor output which occurs when the device is presented with a stimulus which is vectorially orthogonal to the sense axis
- Misalignment and cross-axis response are often difficult to distinguish — Particularly during testing and calibration activities

.7

### Inertial Sensors — Other Noise Sources

Typically characterized as additive in nature

- May have a compound form
  - white noise
    - Gyros: white noise in rate  $\Rightarrow$  Angle Random Walk (ARW)
    - Accels: white noise in accel  $\Rightarrow$  Velocity Random Walk (VRW)

- Quantization noise
  - \* May be due to LSB resolution in ADC's
- Flicker noise
- Colored noise

.8

### Inertial Sensors — Gyro Specific Errors

- G-sensitivity
  - The gyro may be sensitive to acceleration
  - Primarily due to device mass assymetry
  - Mostly in Coriolis-based devices (MEMS)

$$\Delta \vec{\omega}_{ib}^b = G_g \vec{f}_{ib}^b a$$


- G<sup>2</sup>-Sensitivity
  - Anisoelastic effects
  - Due to products of orthogonal forces

.9

### Inertial Sensors — Accel Specific Errors

- Axis Offset
  - The accel may be mounted at a lever-arm distance from the “center” of the Inertial Measurement Unit (IMU)
    - \* Leads to an “ $\omega^2 r$ ” type effect

$$\Delta f_x = \omega_y^2 \Delta x + \omega_z^2 \Delta x = (\omega_y^2 + \omega_z^2) \Delta x$$

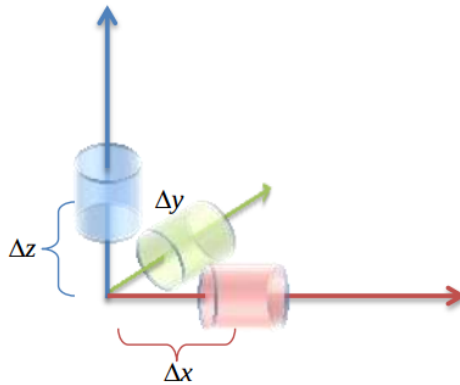

.10

### Inertial Sensors — Sensor Models

- Accelerometer model

$$\tilde{\vec{f}}_{ib}^b = \vec{f}_{ib}^b + \Delta \vec{f}_{ib}^b = \vec{b}_a + (\mathcal{I} + M_a) \vec{f}_{ib}^b + \vec{w}_a \quad (1)$$

- Gyro Model

$$\tilde{\vec{\omega}}_{ib}^b = \vec{\omega}_{ib}^b + \Delta \vec{\omega}_{ib}^b = \vec{b}_g + (\mathcal{I} + M_g) \vec{\omega}_{ib}^b + G_g \vec{f}_{ib}^b + \vec{w}_g \quad (2)$$

- Typically, each measures along a single sense axis requiring three of each to measure the 3-tuple vector

.11