

- **MC9S12 Assembler Directives**
- **A Summary of MC9S12 Instructions**
- **Disassembly of MC9S12 op codes**
  - Review of Addressing Modes
  - Which branch instruction to use (signed vs unsigned)
  - Using X and Y registers as pointers
  - Hand assembling a program
  - How long does a program take to run?
  - Assembler directives
  - How to disassemble an MC9S12 instruction sequence

Summary of HCS12 addressing modes

**ADDRESSING MODES**

Name	Example	Op Code	Effective Address
<b>INH</b> <b>Inherent</b>	<b>ABA</b>	<b>18 06</b>	<b>None</b>
<b>IMM</b> <b>Immediate</b>	<b>LDAA #35</b>	<b>86 35</b>	<b>PC + 1</b>
<b>DIR</b> <b>Direct</b>	<b>LDAA \$35</b>	<b>96 35</b>	<b>0x0035</b>
<b>EXT</b> <b>Extended</b>	<b>LDAA \$2035</b>	<b>B6 20 35</b>	<b>0x2035</b>
<b>IDX</b> <b>Indexed</b>	<b>LDAA 3, X</b>	<b>A6 03</b>	<b>X + 3</b>
<b>IDX1</b>	<b>LDAA 30, X</b>	<b>A6 E0 13</b>	<b>X + 30</b>
<b>IDX2</b>	<b>LDAA 300, X</b>	<b>A6 E2 01 2C</b>	<b>X + 300</b>
<b>IDX</b> <b>Indexed Postincrement</b>	<b>LDAA 3, X+</b>	<b>A6 32</b>	<b>X    (X+3 -&gt; X)</b>
<b>IDX</b> <b>Indexed Preincrement</b>	<b>LDAA 3, +X</b>	<b>A6 22 </b>	<b>X+3 (X+3 -&gt; X)</b>
<b>IDX</b> <b>Indexed Postdecrement</b>	<b>LDAA 3, X-</b>	<b>A6 3D</b>	<b>X    (X-3 -&gt; X)</b>
<b>IDX</b> <b>Indexed Predecrement</b>	<b>LDAA 3, -X</b>	<b>A6 2D</b>	<b>X-3 (X-3 -&gt; X)</b>
<b>REL</b> <b>Relative</b>	<b>BRA \$1050</b> <b>LBRA \$1F00</b>	<b>20 23</b> <b>18 20 0E CF</b>	<b>PC + 2 + Offset</b> <b>PC + 4 + Offset</b>

**A few instructions have two effective addresses:**

- **MOVB # $\$AA$ , $\$1C00$**  Move byte 0xAA (IMM) to address \$1C00 (EXT)
- **MOVW 0,X,0,Y** Move word from address pointed to by X (IDX) to address pointed to by Y (IDX)

**A few instructions have three effective addresses:**

- **BRSET FOO,# $\$03$ ,LABEL** Branch to LABEL (REL) if bits # $\$03$  (IMM) of variable FOO (EXT) are set.

## Using X and Y as Pointers

- Registers X and Y are often used to point to data.
- To initialize pointer use

**ldx #table**

not

**ldx table**

- For example, the following loads the address of table (\$1000) into X; i.e., X will point to table:

**ldx #table ; *Address of table* ⇒ X**

The following puts the first two bytes of table (\$0C7A) into X. X will **not** point to table:

**ldx table ; *First two bytes of table* ⇒ X**

- To step through table, need to increment pointer after use

**ldaa 0,x**

**inx**

or

**ldaa 1,x+**

table	0C
	7A
	D5
	00
	61
	62
	63
	64

```

table:  org    $900
        dc.b  12,122,-43,0
        dc.b  'a','b','c','d'
  
```

### Which branch instruction should you use?

Branch if A > B

Is 0xFF > 0x00?

If unsigned, 0xFF = 255 and 0x00 = 0,  
so 0xFF > 0x00

If signed, 0xFF = -1 and 0x00 = 0,  
so 0xFF < 0x00

Using unsigned numbers: **BHI** (checks C bit of CCR)

Using signed numbers: **BGT** (checks V bit of CCR)

For unsigned numbers, use branch instructions which check C bit

For signed numbers, use branch instructions which check V bit

## Hand Assembling a Program

To hand-assemble a program, do the following:

1. Start with the **org** statement, which shows where the first byte of the program will go into memory.

(e.g., **org \$2000** will put the first instruction at address **\$2000**.)

2. Look at the first instruction. Determine the addressing mode used.

(e.g., **ldab #10** uses IMM mode.)

3. Look up the instruction in the **MC9S12 S12CPUV2 Reference Manual**, find the appropriate Addressing Mode, and the Object Code for that addressing mode. (e.g., **ldab IMM** has object code **C6 ii**.)

- **Table A.1 of the S12CPUV2 Reference Manual** has a concise summary of the instructions, addressing modes, op-codes, and cycles.

4. Put in the object code for the instruction, and put in the appropriate operand. Be careful to convert decimal operands to hex operands if necessary. (e.g., **ldab #10** becomes **C6 0A**.)

5. Add the number of bytes of this instruction to the address of the instruction to determine the address of the next instruction.

(e.g., **\$2000 + 2 = \$2002** will be the starting address of the next instruction.)

```
org $2000
ldab #10
loop: clra
      dbne b,loop
      swi
```

Freescale HC12-Assembler  
(c) Copyright Freescale 1987-2010

Abs.	Rel.	Loc	Obj. code	Source line
1	1			
2	2	0000	2000	prog: equ \$2000
3	3			org prog
4	4	a002000	C60A	ldab #10
5	5	a002002	87	loop: clra
6	6	a002003	0431 FC	dbne b,loop
7	7	a002006	3F	swi

Table A-1. Instruction Set Summary (Sheet 7 of 14)

Source Form	Operation	Addr. Mode	Machine Coding (hex)	Access Detail		S X H I	N Z V C
				HCS12	M68HC12		
LBGT <i>rel</i> <i>s</i>	Long Branch if Greater Than (if $Z + (N \oplus V) = 0$ ) (signed)	REL	18 2E qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBHI <i>rel</i> <i>ts</i>	Long Branch if Higher (if $C + Z = 0$ ) (unsigned)	REL	18 22 qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBHS <i>rel</i> <i>s</i>	Long Branch if Higher or Same (if $C = 0$ ) (unsigned) same function as LBCC	REL	18 24 qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBLT <i>rel</i> <i>s</i>	Long Branch if Less Than or Equal (if $Z + (N \oplus V) = 1$ ) (signed)	REL	18 2F qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBLO <i>rel</i> <i>ts</i>	Long Branch if Lower (if $C = 1$ ) (unsigned) same function as LBCCS	REL	18 25 qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBLS <i>rel</i> <i>s</i>	Long Branch if Lower or Same (if $C + Z = 1$ ) (unsigned)	REL	18 23 qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBMT <i>rel</i> <i>ts</i>	Long Branch if Minus (if $N = 1$ )	REL	18 2B qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBNE <i>rel</i> <i>s</i>	Long Branch if Not Equal (if $Z = 0$ )	REL	18 26 qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBPL <i>rel</i> <i>s</i>	Long Branch if Plus (if $N = 0$ )	REL	18 2A qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBRA <i>rel</i> <i>s</i>	Long Branch Always (if 1=1)	REL	18 20 qq rr	OPPP	OPPP	----	----
LBRA <i>rel</i> <i>ts</i>	Long Branch Always (if 1=1)	REL	18 20 qq rr	OPPP	OPPP	----	----
LBRN <i>rel</i> <i>ts</i>	Long Branch Never (if 1=0)	REL	18 21 qq rr	OPO	OPO	----	----
LBVC <i>rel</i> <i>s</i>	Long Branch if Overflow Bit Clear (if $V=0$ )	REL	18 28 qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LBVS <i>rel</i> <i>ts</i>	Long Branch if Overflow Bit Set (if $V=1$ )	REL	18 29 qq rr	OPPP/OPO <sup>1</sup>	OPPP/OPO <sup>1</sup>	----	----
LDAA <i>#opr</i> <i>s</i> LDAA <i>opr</i> <i>ts</i> LDAA <i>opr</i> <i>ts</i> LDAA <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDAA <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDAA <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDAA [ <i>D</i> , <i>xy</i> <i>sp</i> ] LDAA [ <i>opr</i> <i>ts</i> , <i>xy</i> <i>sp</i> ]	(M) → A Load Accumulator A	IMM DIR EXT IDX IDX1 IDX2 [D,IDX] [IDX2]	86 11 96 dd B6 bh 11 A6 xb A6 xb ff A6 xb aa ff A6 xb A6 xb aa ff	P zPE zPO zPE zPO zPP zPEzPE zPEzPE	P zFP zOP zFP zPO zPP zFPzFP zFPzFP	----	AA0-
LDAB <i>#opr</i> <i>s</i> LDAB <i>opr</i> <i>ts</i> LDAB <i>opr</i> <i>ts</i> LDAB <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDAB <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDAB <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDAB [ <i>D</i> , <i>xy</i> <i>sp</i> ] LDAB [ <i>opr</i> <i>ts</i> , <i>xy</i> <i>sp</i> ]	(M) → B Load Accumulator B	IMM DIR EXT IDX IDX1 IDX2 [D,IDX] [IDX2]	C6 11 D6 dd F6 bh 11 B6 xb B6 xb ff B6 xb aa ff B6 xb B6 xb aa ff	P zPE zPO zPE zPO zPP zPEzPE zPEzPE	P zFP zOP zFP zPO zPP zFPzFP zFPzFP	----	AA0-
LDD <i>#opr</i> <i>ts</i> LDD <i>opr</i> <i>ts</i> LDD <i>opr</i> <i>ts</i> LDD <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDD <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDD <i>opr</i> <i>ts</i> <i>xy</i> <i>sp</i> LDD [ <i>D</i> , <i>xy</i> <i>sp</i> ] LDD [ <i>opr</i> <i>ts</i> , <i>xy</i> <i>sp</i> ]	(M+1) → A:B Load Double Accumulator D (A:B)	IMM DIR EXT IDX IDX1 IDX2 [D,IDX] [IDX2]	CC j j kk DC dd FC bh 11 BC xb BC xb ff BC xb aa ff BC xb BC xb aa ff	PO zPE zPO zPE zPO zPP zPEzPE zPEzPE	OP zFP zOP zFP zPO zPP zFPzFP zFPzFP	----	AA0-

Note 1. OPPP/OPO indicates this instruction takes four cycles to refill the instruction queue if the branch is taken and three cycles if the branch is not taken.

Table A-1. Instruction Set Summary (Sheet 3 of 14)

Source Form	Operation	Addr. Mode	Machine Coding (hex)	HCS12	Access Detail M68HC12	S X H I	N Z V C
BLS <i>nb</i>	Branch if Lower or Same (if $C + Z = 1$ ) (unsigned)	REL	23 <i>rr</i>	<i>ppp/p<sup>1</sup></i>	<i>ppp/p<sup>1</sup></i>	----	----
BLT <i>nb</i>	Branch if Less Than (if $N \oplus V = 1$ ) (signed)	REL	2D <i>rr</i>	<i>ppp/p<sup>1</sup></i>	<i>ppp/p<sup>1</sup></i>	----	----
BMI <i>nb</i>	Branch if Minus (if $N = 1$ )	REL	2B <i>rr</i>	<i>ppp/p<sup>1</sup></i>	<i>ppp/p<sup>1</sup></i>	----	----
BNE <i>nb</i>	Branch if Not Equal (if $Z = 0$ )	REL	26 <i>rr</i>	<i>ppp/p<sup>1</sup></i>	<i>ppp/p<sup>1</sup></i>	----	----
BPL <i>nb</i>	Branch if Plus (if $N = 0$ )	REL	2A <i>rr</i>	<i>ppp/p<sup>1</sup></i>	<i>ppp/p<sup>1</sup></i>	----	----
BRA <i>nb</i>	Branch Always (if $1 = 1$ )	REL	20 <i>rr</i>	<i>ppp</i>	<i>ppp</i>	----	----
BRCLR <i>opn16a, mask8, nb</i> BRCLR <i>opn16a, mask8, nb</i> BRCLR <i>opn02_xyisp, mask8, nb</i> BRCLR <i>opn02_xyisp, mask8, nb</i> BRCLR <i>opn16_xyisp, mask8, nb</i>	Branch if (M) $\oplus$ (imm) = 0 (if All Selected Bit(s) Clear)	DIR EXT IDX IDX1 IDX2	4F dd mm <i>rr</i> 1F bh 11 mm <i>rr</i> 0F xb mm <i>rr</i> 0F xb ff mm <i>rr</i> 0F xb oo ff mm <i>rr</i>	<i>rppp</i> <i>rpppp</i> <i>rppp</i> <i>rpppp</i> <i>rpppppp</i>	<i>rppp</i> <i>rpppp</i> <i>rppp</i> <i>rpppp</i> <i>rpppppp</i>	----	----
BRN <i>nb</i>	Branch Never (if $1 = 0$ )	REL	21 <i>rr</i>	<i>p</i>	<i>p</i>	----	----
BRSET <i>opn8, mask8, nb</i> BRSET <i>opn16a, mask8, nb</i> BRSET <i>opn02_xyisp, mask8, nb</i> BRSET <i>opn02_xyisp, mask8, nb</i> BRSET <i>opn16_xyisp, mask8, nb</i>	Branch if (M) $\oplus$ (imm) = 0 (if All Selected Bit(s) Set)	DIR EXT IDX IDX1 IDX2	4E dd mm <i>rr</i> 1E bh 11 mm <i>rr</i> 0E xb mm <i>rr</i> 0E xb ff mm <i>rr</i> 0E xb oo ff mm <i>rr</i>	<i>rppp</i> <i>rpppp</i> <i>rppp</i> <i>rpppp</i> <i>rpppppp</i>	<i>rppp</i> <i>rpppp</i> <i>rppp</i> <i>rpppp</i> <i>rpppppp</i>	----	----
BSET <i>opn8, mask8</i> BSET <i>opn16a, mask8</i> BSET <i>opn02_xyisp, mask8</i> BSET <i>opn02_xyisp, mask8</i> BSET <i>opn16_xyisp, mask8</i>	(M) $\oplus$ (imm) $\rightarrow$ M Set Bit(s) in Memory	DIR EXT IDX IDX1 IDX2	4C dd mm 1C bh 11 mm 0C xb mm 0C xb ff mm 0C xb oo ff mm	<i>rppw</i> <i>rppw</i> <i>rppw</i> <i>rppw</i> <i>rppppp</i>	<i>rppw</i> <i>rppw</i> <i>rppw</i> <i>rppw</i> <i>rppppp</i>	----	A A 0 -
BSR <i>nb</i>	(SP) - 2 $\rightarrow$ SP; RTN <sub>C</sub> RTN <sub>L</sub> $\rightarrow$ M <sub>(SP)</sub> M <sub>(SP+1)</sub> Subroutine address $\rightarrow$ PC Branch to Subroutine	REL	07 <i>rr</i>	<i>pppp</i>	<i>pppp</i>	----	----
BVC <i>nb</i>	Branch if Overflow Bit Clear (if $V = 0$ )	REL	2B <i>rr</i>	<i>ppp/p<sup>1</sup></i>	<i>ppp/p<sup>1</sup></i>	----	----
BVS <i>nb</i>	Branch if Overflow Bit Set (if $V = 1$ )	REL	29 <i>rr</i>	<i>ppp/p<sup>1</sup></i>	<i>ppp/p<sup>1</sup></i>	----	----
CALL <i>opn16a, page</i> CALL <i>opn02_xyisp, page</i> CALL <i>opn02_xyisp, page</i> CALL <i>opn16_xyisp, page</i> CALL [D] <i>_xyisp</i> CALL [ <i>opn16_xyisp</i> ]	(SP) - 2 $\rightarrow$ SP; RTN <sub>C</sub> RTN <sub>L</sub> $\rightarrow$ M <sub>(SP)</sub> M <sub>(SP+1)</sub> (SP) - 1 $\rightarrow$ SP; (PPG) $\rightarrow$ M <sub>(SP)</sub> pg $\rightarrow$ PPAGE register; Program address $\rightarrow$ PC  Call subroutine in extended memory (Program may be located on another expansion memory page.)  Indirect modes get program address and new pg value based on pointer.	EXT IDX IDX1 IDX2 [D,IDX] [IDX2]	4A bh 11 pg 4B xb pg 4B xb ff pg 4B xb oo ff pg 4B xb 4B xb oo ff	gnSpPPP gnSpPPP gnSpPPP gnSpPPP EgnSpPPP EgnSpPPP	gnEgSpPPP gnEgSpPPP gnEgSpPPP gnEgSpPPP EgnEgSpPPP EgnEgSpPPP	----	----
CBA	(A) - (B) Compare 8-Bit Accumulators	INH	1B 17	00	00	----	A A A A
CLC	0 $\rightarrow$ C Translate b ANDCC # $\$FE$	IMM	10 FE	<i>p</i>	<i>p</i>	----	---0
CLI	0 $\rightarrow$ I Translate b ANDCC # $\$EF$ (enables I-bit interrupts)	IMM	10 EF	<i>p</i>	<i>p</i>	----	---0
CLR <i>opn16a</i> CLR <i>opn02_xyisp</i> CLR <i>opn02_xyisp</i> CLR <i>opn16_xyisp</i> CLR [D] <i>_xyisp</i> CLR [ <i>opn16_xyisp</i> ] CLRA CLRB	0 $\rightarrow$ M Clear Memory Location  0 $\rightarrow$ A Clear Accumulator A 0 $\rightarrow$ B Clear Accumulator B	EXT IDX IDX1 IDX2 [D,IDX] [IDX2] INH INH	79 bh 11 69 xb 69 xb ff 69 xb oo ff 69 xb 69 xb oo ff 87 C7	<i>ppw</i> <i>ppw</i> <i>ppw</i> <i>ppw</i> <i>ppfw</i> <i>ppfw</i> 0 0	<i>wpp</i> <i>ppw</i> <i>ppw</i> <i>ppw</i> <i>ppfw</i> <i>ppfw</i> 0 0	----	0 1 0 0
CLV	0 $\rightarrow$ V Translate b ANDCC # $\$FD$	IMM	10 FD	<i>p</i>	<i>p</i>	----	---0-

Note 1. PPPP indicates this instruction takes three cycles to refill the instruction queue if the branch is taken and one program latch cycle if the branch is not taken.



Table A-1. Instruction Set Summary (Sheet 4 of 14)

Source Form	Operation	Addr. Mode	Machine Coding (hex)	Access Detail		SXHI	NZVC
				HCS12	M68HC12		
CMPB #opr16 CMPB opr16 CMPB opr16a CMPB opr16,xyop CMPB opr16,xyop CMPB [D,xyop] CMPB [opr16,xyop]	(B) - (M) Compare Accumulator B with Memory	IMM DIR EXT IDX IDX1 IDX2 (D,IDX) (IDX2)	C1 11 D1 dd F1 hh 11 E1 xb E1 xb ff E1 xb oo ff E1 xb oo ff	F rPF rPO rPF rPO ErPP E1ErPF E1PrPF	F rPF rOP rPF rPO ErPP E1ErPF E1PrPF	----	AAAA
COM #opr16a COM opr16,xyop COM opr16,xyop COM opr16,xyop COM [D,xyop] COM [opr16,xyop] COMA COMB	(M) → M equivalent to \$FF - (M) → M 1's Complement Memory Location  (A) → A Complement Accumulator A (B) → B Complement Accumulator B	EXT IDX IDX1 IDX2 (D,IDX) (IDX2) INH INH	71 hh 11 61 xb 61 xb ff 61 xb oo ff 61 xb 61 xb oo ff 41 51	rPO rPW rPO ErPP E1ErPW E1PrPW O O	rOPw rPW rPOw ErPPw E1ErPW E1PrPW O O	----	AA01
CPD #opr16 CPD opr16a CPD opr16a CPD opr16,xyop CPD opr16,xyop CPD opr16,xyop CPD [D,xyop] CPD [opr16,xyop]	(A,B) - (MM+1) Compare D to Memory (16-Bit)	IMM DIR EXT IDX IDX1 IDX2 (D,IDX) (IDX2)	BC jj kk 9C dd BC hh 11 AC xb AC xb ff AC xb oo ff AC xb oo ff	PO rPF rPO rPF rPO ErPP E1ErPF E1PrPF	OP rPF rOP rPF rPO ErPP E1ErPF E1PrPF	----	AAAA
CPS #opr16 CPS opr16a CPS opr16a CPS opr16,xyop CPS opr16,xyop CPS opr16,xyop CPS [D,xyop] CPS [opr16,xyop]	(SP) - (MM+1) Compare SP to Memory (16-Bit)	IMM DIR EXT IDX IDX1 IDX2 (D,IDX) (IDX2)	BF jj kk 9F dd BF hh 11 AF xb AF xb ff AF xb oo ff AF xb oo ff	PO rPF rPO rPF rPO ErPP E1ErPF E1PrPF	OP rPF rOP rPF rPO ErPP E1ErPF E1PrPF	----	AAAA
CPX #opr16 CPX opr16a CPX opr16a CPX opr16,xyop CPX opr16,xyop CPX opr16,xyop CPX [D,xyop] CPX [opr16,xyop]	(X) - (MM+1) Compare X to Memory (16-Bit)	IMM DIR EXT IDX IDX1 IDX2 (D,IDX) (IDX2)	BE jj kk 9E dd BE hh 11 AE xb AE xb ff AE xb oo ff AE xb oo ff	PO rPF rPO rPF rPO ErPP E1ErPF E1PrPF	OP rPF rOP rPF rPO ErPP E1ErPF E1PrPF	----	AAAA
CPY #opr16 CPY opr16a CPY opr16a CPY opr16,xyop CPY opr16,xyop CPY opr16,xyop CPY [D,xyop] CPY [opr16,xyop]	(Y) - (MM+1) Compare Y to Memory (16-Bit)	IMM DIR EXT IDX IDX1 IDX2 (D,IDX) (IDX2)	BD jj kk 9D dd BD hh 11 AD xb AD xb ff AD xb oo ff AD xb oo ff	PO rPF rPO rPF rPO ErPP E1ErPF E1PrPF	OP rPF rOP rPF rPO ErPP E1ErPF E1PrPF	----	AAAA
DAA	Adjust Sum to BCD Decimal Adjust Accumulator A	INH	18 07	OFO	OFO	----	AA?A
DBEQ abd,ys,rd	(ontr) - 1 → ontr if (ontr) = 0, then Branch else Continue to next instruction  Decrement Counter and Branch if = 0 (ontr = A, B, D, X, Y, or SP)	REL (9-bit)	04 1b rr	PPP (branch) PPO (no branch)	PPP	----	----
DBNE abd,ys,rd	(ontr) - 1 → ontr if (ontr) not = 0, then Branch, else Continue to next instruction  Decrement Counter and Branch if ≠ 0 (ontr = A, B, D, X, Y, or SP)	REL (9-bit)	04 1b rr	PPP (branch) PPO (no branch)	PPP	----	----

# DBNE      Decrement and Branch if Not Equal to Zero      DBNE

**Operation**    (counter) - 1 ⇒ counter  
 If (counter) not = 0, then (PC) + \$0003 + rel ⇒ PC

Subtracts one from the counter register A, B, D, X, Y, or SP. Branches to a relative destination if the counter register does not reach zero. Rel is a 9-bit two's complement offset for branching forward or backward in memory. Branching range is \$100 to \$0FF (-256 to +255) from the address following the last byte of object code in the instruction.

**CCR Effects**

S	X	H	I	N	Z	V	C
-	-	-	-	-	-	-	-

**Code and CPU Cycles**

Source Form	Address Mode	Machine Code (Hex)	CPU Cycles
DBNE <i>abdxy</i> sp, <i>rel</i> 9	REL (9-bit)	04 1b rr	PPP (branch) PPO (no branch)

Source Form	Postbyte <sup>1</sup>	Object Code	Counter Register	Offset
DBNE A, <i>rel</i> 9	0010 X000	04 20 rr	A	Positive
DBNE B, <i>rel</i> 9	0010 X001	04 21 rr	B	
DBNE D, <i>rel</i> 9	0010 X100	04 24 rr	D	
DBNE X, <i>rel</i> 9	0010 X101	04 25 rr	X	
DBNE Y, <i>rel</i> 9	0010 X110	04 26 rr	Y	
DBNE SP, <i>rel</i> 9	0010 X111	04 27 rr	SP	
DBNE A, <i>rel</i> 9	0011 X000	04 30 rr	A	Negative
DBNE B, <i>rel</i> 9	0011 X001	04 31 rr	B	
DBNE D, <i>rel</i> 9	0011 X100	04 34 rr	D	
DBNE X, <i>rel</i> 9	0011 X101	04 35 rr	X	
DBNE Y, <i>rel</i> 9	0011 X110	04 36 rr	Y	
DBNE SP, <i>rel</i> 9	0011 X111	04 37 rr	SP	

NOTES:  
 1. Bits 7:6:5 select DBEQ or DBNE; bit 4 is the offset sign bit; bit 3 is not used; bits 2:1:0 select the counter register.

## MC9S12 Cycles

- MC9S12 works on **48 MHz clock**
- A processor cycle takes 2 clock cycles – P clock is 24 MHz
- Each processor cycle takes **41.7 ns** (1/24  $\mu$ s) to execute
- An instruction takes from **1 to 12** processor cycles to execute
- You can determine how many cycles an instruction takes by looking up the CPU cycles for that instruction in the Reference Manual.
  - For example, **LDAB** using the **IMM** addressing mode shows one CPU cycle (of type P).
  - **LDAB** using the **EXT** addressing mode shows three CPU cycles (of type **rPO**).
  - Section 6.6 of the S12CPUV2 Reference Manual explains what the HCS12 is doing during each of the different types of CPU cycles.

	<i>Inst</i>	<i>Mode</i>	<i>Cycles</i>
2000	<b>org \$2000</b>		
2000 C6 0A	<b>ldab #10</b>	<i>LDAB (IMM)</i>	1
2002 87	<b>loop:clra</b>	<i>CLRA (INH)</i>	1
2003 04 31 FC	<b>dbne b,loop</b>	<i>DBNE (REL)</i>	3
2006 3F	<b>swi</b>	<i>SWI</i>	9

The program executes the **ldab #10** instruction once. It then goes through the loop 10 times (which has two instructions, one with one cycle and one with three cycles), and finishes with the swi instruction (which takes 9 cycles).

Total number of cycles:

$$1 + 10 \times (1 + 3) + 9 = 50$$

$$50 \text{ cycles} = 50 \times 41.7 \text{ ns/cycle} = 2.08 \mu\text{s}$$

# LDAB

Load B

# LDAB

**Operation** (M) ⇒ B  
or  
imm ⇒ B

Loads B with either the value in M or an immediate value.

**CCR**

**Effects**

S	X	H	I	N	Z	V	C
-	-	-	-	Δ	Δ	0	-

N: Set if MSB of result is set; cleared otherwise

Z: Set if result is \$00; cleared otherwise

V: Cleared

**Code and  
CPU  
Cycles**

Source Form	Address Mode	Machine Code (Hex)	CPU Cycles
LDAB #opr8l	IMM	C6 ii	P
LDAB opr8a	DIR	D6 dd	rPE
LDAB opr16a	EXT	F6 hh ll	rPO
LDAB oprx0_xysppc	IDX	E6 xb	rPE
LDAB oprx8_xysppc	IDX1	E6 xb ff	rPO
LDAB oprx16_xysppc	IDX2	E6 xb ee ff	frPP
LDAB [D,xysppc]	[D,IDX]	E6 xb	fifrPE
LDAB [oprx16,xysppc]	[IDX2]	E6 xb ee ff	fIfrPE

## Assembler Directives

- In order to write an assembly language program it is necessary to use assembler **directives**.
- These are not instructions which the HC12 executes but are directives to the assembler program about such things as where to put code and data into memory.
- CodeWarrior has a large number of assembler directives, which can be found in the CodeWarrior help section.
- We will use only a few of these directives. (Note: In the following table, [ ] means an optional argument.) Here are the ones we will need:

<b>Directive Name</b>	<b>Description</b>	<b>Example</b>
<b>equ</b>	Give a value to a symbol	<b>len: equ 100</b>
<b>org</b>	Set starting value of location counter where code or data will go	<b>org \$1000</b>
<b>dc.b</b>	Allocate and initialize storage for 8-bit variables. Place the bytes in successive memory locations	<b>var: dc.b 2,18 name: dc.b "Jane"</b>
<b>dc.w</b>	Allocate and initialize storage for 16-bit variables. Place the bytes in successive memory locations	<b>var: dc.w \$ABCD</b>
<b>ds.b</b>	Allocate specified number of 8-bit storage places	<b>Table: ds.b 10</b>
<b>ds.w</b>	Allocate specified number of 16-bit storage spaces	<b>table: ds.w 50</b>
<b>dcb.b</b>	Fill memory with a given value: The first value is the number of bytes to fill. The second number is the value to put into memory	<b>init_data: dcb.b 100,0</b>

## Using labels in assembly programs

A **label** is defined by a name followed by a colon as the first thing on a line. When the label is referred to in the program, it has the numerical value of the location counter when the label was defined.

Here is a code fragment using labels and the assembler directives `dc` and `ds`:

```
        org    $2000
table1: dc.b    $23,$17,$f2,$a3,$56
table2: ds.b    5
var:    dc.w    $43af
```

The CodeWarrior assembler produces a listing file (`.lst`). Here is the listing file from the assembler:

```
Freescale HC12-Assembler
(c) Copyright Freescale 1987-2009
Abs. Rel.  Loc  Obj. code  Source line
-----
1         1                org    $2000
2         2 a002000 2317 F2A3 table1:  dc.b  $23,$17,$f2,$a3,$56
          002004 56
3         3 a002005                table2: ds.b  5
4         4 a00200A 43AF          var:    dc.w  $43af
5         5
```

Note that **table1** is a name with the value of \$2000, the value of the location counter defined in the **org** directive. Five bytes of data



are defined by the **dc.b** directive, so the location counter is increased from \$2000 to \$2005.

Note that **table2** is a name with the value of \$2005. Five bytes of data are set aside for table2 by the **ds.b 5** directive. The as12 assembler initialized these five bytes of data to all zeros. **var** is a name with the value of \$200a, the first location after table2.

## HC12 Instructions

1. Data Transfer and Manipulation Instructions — instructions which move and manipulate data (S12CPUV2 Reference Manual, Sections 5.3, 5.4, and 5.5).

- Load and Store — load copy of memory contents into a register; store copy of register contents into memory.

LDAA \$2000 ; Copy contents of addr \$2000 into A  
STD 0,X ; Copy contents of D to addr X and X+1

- Transfer — copy contents of one register to another.

TBA ; Copy B to A  
TFR X,Y ; Copy X to Y

- Exchange — exchange contents of two registers.

XGDX ; Exchange contents of D and X  
EXG A,B ; Exchange contents of A and B

- Move — copy contents of one memory location to another.

MOVB \$2000,\$20A0 ; Copy byte at \$2000 to \$20A0  
MOVW 2,X+,2,Y+ ; Copy two bytes from address held  
; in X to address held in Y  
; Add 2 to X and Y

2. Arithmetic Instructions — addition, subtraction, multiplication, division (S12CPUV2 Reference Manual, Sections 5.6, 5.8 and 5.12).

ABA ; Add B to A; results in A  
SUBD \$20A1 ; Subtract contents of \$20A1 from D

INX ; Increment X by 1  
MUL ; Multiply A by B; results in D

3. Logic and Bit Instructions — perform logical operations (S12CPUV2 Reference Manual, Sections 5.9, 5.10, 5.11, 5.13 and 5.14).

- Logic Instructions

ANDA \$2000 ; Logical AND of A with contents of  
; \$2000  
EORB 2,X ; Exclusive OR B with contents of  
; address (X+2)

- Clear, Complement and Negate Instructions

NEG -2,X ; Negate (2's comp) contents of  
; address (X-2)  
CLRA ; Clear ACC A

- Bit manipulate and test instructions — work with bits of a register or memory.

BITA #\$08 ; Check to see if Bit 3 of A is set  
BSET \$0002,#\$18 ; Set bits 3 and 4 of address \$0002

- Shift and rotate instructions

LSLA ; Logical shift left A  
ASR \$1000 ; Arithmetic shift right value at address  
; \$1000

4. Compare and test instructions — test contents of a register or memory (to see if zero, negative, etc.), or compare contents of a register to memory (to see if bigger than, etc.) (**S12CPUV2 Reference Manual**, Section 5.9).

```
TSTA          ; (A)-0 -- set flags accordingly
CPX #$8000    ; (X) - $8000 -- set flags accordingly
```

5. Jump and Branch Instructions — Change flow of program (e.g., goto, if-then-else, switch-case) (**S12CPUV2 Reference Manual**, Sections 5.19, 5.20 and 5.21).

```
JMP L1        ; Start executing code at address label
               ; L1
BEQ L2        ; If Z bit set, go to label L2
DBNE X,L3     ; Decrement X; if X not 0 then goto L3
BRCLR $1A,#$80,L4 ; If bit 7 of addr $1A clear, go to
               ; label L4
JSR sub1      ; Jump to subroutine sub1
RTS          ; Return from subroutine
```

6. Interrupt Instructions — Initiate or terminate an interrupt call (**S12CPUV2 Reference Manual**, Section 5.22).

- Interrupt instructions
- ```
SWI ; Initiate software interrupt
RTI ; Return from interrupt
```

7. Index Manipulation Instructions — Put address into X, Y or SP, manipulate X, Y or SP (**S12CPUV2 Reference Manual**, Section 5.23).

ABX           ; Add (B) to (X)  
LEAX 5,Y     ; Put address (Y) + 5 into X

8. Condition Code Instructions — change bits in Condition Code Register (**S12CPUV2 Reference Manual**, Section 5.26).

ANDCC #\$f0   ; Clear N, Z, C and V bits of CCR  
SEV           ; Set V bit of CCR

9. Stacking Instructions — push data onto and pull data off of stack (**S12CPUV2 Reference Manual**, Section 5.24).

PSHA         ; Push contents of A onto stack  
PULX         ; Pull two top bytes of stack, put into X

10. Stop and Wait Instructions — put MC9S12 into low power mode (**S12CPUV2 Reference Manual**, Section 5.27).

STOP         ; Put into lowest power mode  
WAI         ; Put into low power mode until next interrupt

11. Null Instructions

NOP         ; No operation  
BRN         ; Branch never

12. Instructions we won't discuss or use — BCD arithmetic, fuzzy logic, minimum and maximum, multiply-accumulate, table interpolation (**S12CPUV2 Reference Manual**, Sections 5.7, 5.16, 5.17, and 5.18).

### Disassembly of an HC12 Program

- It is sometimes useful to be able to convert *HC12 op codes* into *mnemonics*.

**For example, consider the hex code:**

ADDR DATA

-----  
1000 **C6 05** CE 20 00 **E6 01 18 06** 04 35 EE **3F**

- To determine the instructions, use Table A-2 of the HCS12 Core Users Guide.
  - If the first byte of the instruction is anything other than **\$18**, use Sheet 1 of Table A.2. From this table, determine the number of bytes of the instruction and the addressing mode. For example, **\$C6** is a two-byte instruction, the mnemonic is **LDAB**, and it uses the **IMM** addressing mode. Thus, the two bytes **C6 05** is the op code for the instruction **LDAB #\$05**.
  - If the first byte is **\$18**, use Sheet 2 of Table A.2, and do the same thing. For example, **18 06** is a two byte instruction, the mnemonic is **ABA**, and it uses the **INH** addressing mode, so

there is no operand. Thus, the two bytes **18 06** is the op code for the instruction **ABA**.

- Indexed addressing mode is fairly complicated to disassemble. You need to use Table A.3 to determine the operand. For example, the op code **\$E6** indicates **LDAB indexed**, and may use two to four bytes (one to three bytes in addition to the op code). The postbyte **01** indicates that the operand is 0,1, which is **5-bit constant offset**, which takes only one additional byte. All 5-bit constant offset, pre and post increment and decrement, and register offset instructions use one additional byte. All **9-bit constant offset** instructions use two additional bytes, with the second byte holding 8 bits of the 9 bit offset. (**The 9th bit is a direction bit**, which is held in the first postbyte.) All 16-bit constant offset instructions use three postbytes, with the 2nd and 3rd holding the 16-bit unsigned offset.

– Transfer (**TFR**) and exchange (**EXG**) instructions all have the op code **\$B7**. Use Table A.5 to determine whether it is **TFR** or an **EXG**, and to determine which registers are being used. If the most significant bit of the postbyte is **0**, **the instruction is a transfer instruction**.

- Loop instructions (Decrement and Branch, Increment and Branch, and Test and Branch) all have the op code **\$04**. To determine which instruction the op code **\$04** implies, and whether the branch is positive (forward) or negative (backward), use Table A.6. For example, in the sequence **04 35 EE**, the 04 indicates a loop instruction. The 35 indicates it is a **DBNE X** instruction (decrement register X and branch if

result is not equal to zero), and the direction is backward (negative). The **EE** indicates a branch of -18 bytes.

-

- Use up all the bytes for one instruction, then go on to the next instruction.

|                 |                       |                                                                                                                  |
|-----------------|-----------------------|------------------------------------------------------------------------------------------------------------------|
| <b>C6 05</b>    | <b>⇒ LDAB #\$05</b>   | two-byte LDAB, IMM addressing mode                                                                               |
| <b>CE 20 00</b> | <b>⇒ LDX #\$2000</b>  | three-byte LDX, IMM addressing mode                                                                              |
| <b>E6 01</b>    | <b>⇒ LDAB 1,X</b>     | two to four-byte LDAB, IDX addressing mode. Operand 01 => 1,X, a 5b constant offset which uses only one postbyte |
| <b>18 06</b>    | <b>⇒ ABA</b>          | two-byte ABA, INH addressing mode                                                                                |
| <b>04 35 EE</b> | <b>⇒ DBNE X,(-18)</b> | three-byte loop instruction<br>Postbyte 35 indicates DBNE X, negative                                            |
| <b>3F</b>       | <b>⇒ SWI</b>          | one-byte SWI, INH addressing mode                                                                                |



Table A-2. CPU12 Opcode Map (Sheet 1 of 2)

|    |      |       |     |       |     |     |     |      |     |      |      |    |       |       |     |      |      |    |      |     |     |      |     |     |      |      |    |      |      |    |     |     |      |      |         |      |      |      |      |      |      |     |     |      |      |     |     |     |     |    |   |
|----|------|-------|-----|-------|-----|-----|-----|------|-----|------|------|----|-------|-------|-----|------|------|----|------|-----|-----|------|-----|-----|------|------|----|------|------|----|-----|-----|------|------|---------|------|------|------|------|------|------|-----|-----|------|------|-----|-----|-----|-----|----|---|
| 00 | BGND | 15    | 10  | ANDCC | 1   | 20  | BRA | 3    | 30  | PULX | 3    | 40 | NEGA  | 1     | 50  | NEGB | 1    | 60 | NEG  | 3-6 | 70  | NEG  | 4   | 80  | SUBA | 1    | 90 | SUBA | 3    | A0 | 3-6 | B0  | SUBA | 3    | C0      | SUBB | 1    | D0   | SUBB | 3    | E0   | 3-6 | F0  | SUBB | 3    |     |     |     |     |    |   |
| IH | 1    | IM    | 2   | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 01 | MEM  | 5     | 11  | EDIV  | 11  | 21  | BRN | 1    | 31  | PULY | 3    | 41 | COMA  | 1     | 51  | COMB | 1    | 61 | COM  | 3-6 | 71  | COM  | 4   | 81  | CMPA | 1    | 91 | CMPA | 3    | A1 | 3-6 | B1  | CMPA | 3    | C1      | CMPB | 1    | D1   | CMPB | 3    | E1   | 3-6 | F1  | CMPB | 3    |     |     |     |     |    |   |
| IH | 1    | IH    | 1   | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 02 | INY  | 1     | 12  | MUL   | 1   | 22  | BHI | 1    | 32  | PULA | 1    | 42 | INCA  | 1     | 52  | INCB | 1    | 62 | INC  | 3-6 | 72  | INC  | 4   | 82  | SBCA | 1    | 92 | SBCA | 3    | A2 | 3-6 | B2  | SBCA | 3    | C2      | SBCB | 1    | D2   | SBCB | 3    | E2   | 3-6 | F2  | SBCB | 3    |     |     |     |     |    |   |
| IH | 1    | IH    | 1   | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 03 | DEY  | 1     | 13  | EMUL  | 3   | 23  | BLS | 3/1  | 33  | PULB | 3    | 43 | DECA  | 1     | 53  | DECB | 1    | 63 | DEC  | 3-6 | 73  | DEC  | 4   | 83  | SUBD | 1    | 93 | SUBD | 3    | A3 | 3-6 | B3  | SUBD | 3    | C3      | ADDD | 1    | D3   | ADDD | 3    | E3   | 3-6 | F3  | ADDD | 3    |     |     |     |     |    |   |
| IH | 1    | IH    | 1   | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 04 | loop | 3     | 14  | ORCC  | 1   | 24  | BCC | 3/1  | 34  | PSHX | 3    | 44 | LSRA  | 1     | 54  | LSRB | 1    | 64 | LSR  | 3-6 | 74  | LSR  | 4   | 84  | ANDA | 1    | 94 | ANDA | 3    | A4 | 3-6 | B4  | ANDA | 3    | C4      | ANDB | 1    | D4   | ANDB | 3    | E4   | 3-6 | F4  | ANDB | 3    |     |     |     |     |    |   |
| RL | 3    | IM    | 2   | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 05 | 3-6  | 15    | 4-7 | JMP   | 15  | 25  | 3/1 | BJSR | 3/1 | 35   | PSHY | 2  | 45    | ROLA  | 1   | 55   | ROLB | 1  | 65   | ROL | 3-6 | 75   | ROL | 4   | 85   | BITA | 1  | 95   | BITA | 3  | A5  | 3-6 | B5   | BITA | 3       | C5   | BITB | 1    | D5   | BITB | 3    | E5  | 3-6 | F5   | BITB | 3   |     |     |     |    |   |
| ID | 2-4  | ID    | 2-4 | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 06 | JMP  | 3     | 16  | JSR   | 4   | 26  | 3/1 | BNE  | 3/1 | 36   | PSHA | 2  | 46    | RORA  | 1   | 56   | RORB | 1  | 66   | ROR | 3-6 | 76   | ROR | 4   | 86   | LDAA | 1  | 96   | LDAA | 3  | A6  | 3-6 | B6   | LDAA | 3       | C6   | LDAB | 1    | D6   | LDAB | 3    | E6  | 3-6 | F6   | LDAB | 3   |     |     |     |    |   |
| EX | 3    | EX    | 3   | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 07 | BSR  | 4     | 17  | JSR   | 4   | 27  | 3/1 | BEQ  | 3/1 | 37   | PSHB | 2  | 47    | ASRA  | 1   | 57   | ASRB | 1  | 67   | ASR | 3-6 | 77   | ASR | 4   | 87   | CLRA | 1  | 97   | TSTA | 1  | A7  | NOP | 1    | B7   | TFR/EXG | 1    | C7   | CLRB | 1    | D7   | TSTB | 1   | E7  | 3-6  | F7   | TST | 3   |     |     |    |   |
| RL | 2    | DI    | 2   | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IH | 1    | IH  | 1   | ID   | 2-4 | EX  | 3    | IH   | 1  | IH   | 1    | IH | 1   | IH  | 1    | IH   | 1       | IH   | 1    | IH   | 1    | IH   | 1    | IH  | 1   | IH   | 1    | IH  | 1   | ID  | 2-4 | EX | 3 |
| 08 | INX  | 1     | 18  | -     | 28  | 3/1 | BVC | 3/1  | 38  | PULC | 3    | 48 | ASLA  | 1     | 58  | ASLB | 1    | 68 | ASL  | 3-6 | 78  | ASL  | 4   | 88  | EORA | 1    | 98 | EORA | 3    | A8 | 3-6 | B8  | EORA | 3    | C8      | EORB | 1    | D8   | EORB | 3    | E8   | 3-6 | F8  | EORB | 3    |     |     |     |     |    |   |
| IH | 1    | -     | RL  | 2     | IH  | 1   | IH  | 1    | IH  | 1    | IH   | 1  | IH    | 1     | ID  | 2-4  | EX   | 3  | IM   | 2   | DI  | 2    | ID  | 2-4 | EX   | 3    | IM | 2    | DI   | 2  | ID  | 2-4 | EX   | 3    | IM      | 2    | DI   | 2    | ID   | 2-4  | EX   | 3   | IM  | 2    | DI   | 2   | ID  | 2-4 | EX  | 3  |   |
| 09 | DEX  | 1     | 19  | 2     | 29  | 3/1 | BVS | 3/1  | 39  | PSHC | 2    | 49 | LSRD  | 1     | 59  | ASLD | 1    | 69 | CLR  | 3-6 | 79  | CLR  | 4   | 89  | ADCA | 1    | 99 | ADCA | 3    | A9 | 3-6 | B9  | ADCA | 3    | C9      | ADCB | 1    | D9   | ADCB | 3    | E9   | 3-6 | F9  | ADCB | 3    |     |     |     |     |    |   |
| IH | 1    | ID    | 2-4 | RL    | 2   | IH  | 1   | IH   | 1   | IH   | 1    | IH | 1     | ID    | 2-4 | EX   | 3    | IM | 2    | DI  | 2   | ID   | 2-4 | EX  | 3    | IM   | 2  | DI   | 2    | ID | 2-4 | EX  | 3    | IM   | 2       | DI   | 2    | ID   | 2-4  | EX   | 3    | IM  | 2   | DI   | 2    | ID  | 2-4 | EX  | 3   |    |   |
| 0A | RTC  | 17    | 1A  | 2     | 2A  | 3/1 | BPL | 3/1  | 3A  | PULD | 3    | 4A | CALL  | 17    | 5A  | STAA | 1    | 6A | STAA | 2-4 | 7A  | STAA | 3   | 8A  | ORAA | 1    | 9A | ORAA | 3    | AA | 3-6 | BA  | ORAA | 3    | CA      | ORAB | 1    | DA   | ORAB | 3    | EA   | 3-6 | FA  | ORAB | 3    |     |     |     |     |    |   |
| IH | 1    | ID    | 2-4 | RL    | 2   | IH  | 1   | EX   | 4   | DI   | 2    | ID | 2-4   | EX    | 3   | IM   | 2    | DI | 2    | ID  | 2-4 | EX   | 3   | IM  | 2    | DI   | 2  | ID   | 2-4  | EX | 3   | IM  | 2    | DI   | 2       | ID   | 2-4  | EX   | 3    | IM   | 2    | DI  | 2   | ID   | 2-4  | EX  | 3   |     |     |    |   |
| 0B | RTI  | 18    | 1B  | 2     | 2B  | 3/1 | BMI | 3/1  | 3B  | PSHD | 2    | 4B | CALL  | 17-10 | 5B  | STAB | 1    | 6B | STAB | 2-4 | 7B  | STAB | 3   | 8B  | ADDA | 1    | 9B | ADDA | 3    | AB | 3-6 | BB  | ADDA | 3    | CB      | ADDB | 1    | DB   | ADDB | 3    | EB   | 3-6 | FB  | ADDB | 3    |     |     |     |     |    |   |
| IH | 1    | ID    | 2-4 | RL    | 2   | IH  | 1   | ID   | 2-6 | DI   | 2    | ID | 2-6   | DI    | 2   | ID   | 2-4  | EX | 3    | IM  | 2   | DI   | 2   | ID  | 2-4  | EX   | 3  | IM   | 2    | DI | 2   | ID  | 2-4  | EX   | 3       | IM   | 2    | DI   | 2    | ID   | 2-4  | EX  | 3   | IM   | 2    | DI  | 2   | ID  | 2-4 | EX | 3 |
| 0C | 4-6  | BSET  | 4   | 2C    | 3/1 | BGE | 3/1 | 3C   | 3-5 | wavr | SP   | 4C | BSET  | 4     | 5C  | STD  | 1    | 6C | STD  | 2-4 | 7C  | STD  | 3   | 8C  | CPD  | 1    | 9C | CPD  | 3    | AC | 3-6 | BC  | CPD  | 3    | CC      | LDD  | 1    | DC   | LDD  | 3    | EC   | 3-6 | FC  | LDD  | 3    |     |     |     |     |    |   |
| ID | 3-5  | EX    | 4   | RL    | 2   | SP  | 1   | DI   | 3   | DI   | 2    | ID | 2-4   | EX    | 3   | IM   | 2    | DI | 2    | ID  | 2-4 | EX   | 3   | IM  | 2    | DI   | 2  | ID   | 2-4  | EX | 3   | IM  | 2    | DI   | 2       | ID   | 2-4  | EX   | 3    | IM   | 2    | DI  | 2   | ID   | 2-4  | EX  | 3   |     |     |    |   |
| 0D | 4-6  | BCLR  | 4   | 1D    | 4   | 2D  | 3/1 | BLT  | 3/1 | 3D   | RTS  | 5  | 4D    | BCLR  | 4   | 5D   | STY  | 1  | 6D   | STY | 2-4 | 7D   | STY | 3   | 8D   | CPY  | 1  | 9D   | CPY  | 3  | AD  | 3-6 | BD   | CPY  | 3       | CD   | LDY  | 1    | DD   | LDY  | 3    | ED  | 3-6 | FD   | LDY  | 3   |     |     |     |    |   |
| ID | 3-5  | EX    | 4   | RL    | 2   | IH  | 1   | DI   | 3   | DI   | 2    | ID | 2-4   | EX    | 3   | IM   | 2    | DI | 2    | ID  | 2-4 | EX   | 3   | IM  | 2    | DI   | 2  | ID   | 2-4  | EX | 3   | IM  | 2    | DI   | 2       | ID   | 2-4  | EX   | 3    | IM   | 2    | DI  | 2   | ID   | 2-4  | EX  | 3   |     |     |    |   |
| 0E | 4-6  | BRSET | 5   | 1E    | 5   | 2E  | 3/1 | BGT  | 3/1 | 3E   | 17   | 4E | BRSET | 4     | 5E  | STX  | 1    | 6E | STX  | 2-4 | 7E  | STX  | 3   | 8E  | CPX  | 1    | 9E | CPX  | 3    | AE | 3-6 | BE  | CPX  | 3    | CE      | LDX  | 1    | DE   | LDX  | 3    | EE   | 3-6 | FE  | LDX  | 3    |     |     |     |     |    |   |
| ID | 4-6  | EX    | 5   | RL    | 2   | IH  | 1   | DI   | 4   | DI   | 2    | ID | 2-4   | EX    | 3   | IM   | 2    | DI | 2    | ID  | 2-4 | EX   | 3   | IM  | 2    | DI   | 2  | ID   | 2-4  | EX | 3   | IM  | 2    | DI   | 2       | ID   | 2-4  | EX   | 3    | IM   | 2    | DI  | 2   | ID   | 2-4  | EX  | 3   |     |     |    |   |
| 0F | 4-6  | BRCLR | 5   | 1F    | 5   | 2F  | 3/1 | BLE  | 3/1 | 3F   | 9    | 4F | BRCLR | 4     | 5F  | STS  | 1    | 6F | STS  | 2-4 | 7F  | STS  | 3   | 8F  | CPS  | 1    | 9F | CPS  | 3    | AF | 3-6 | BF  | CPS  | 3    | CF      | LDS  | 1    | DF   | LDS  | 3    | EF   | 3-6 | FF  | LDS  | 3    |     |     |     |     |    |   |
| ID | 4-6  | EX    | 5   | RL    | 2   | IH  | 1   | DI   | 4   | DI   | 2    | ID | 2-4   | EX    | 3   | IM   | 2    | DI | 2    | ID  | 2-4 | EX   | 3   | IM  | 2    | DI   | 2  | ID   | 2-4  | EX | 3   | IM  | 2    | DI   | 2       | ID   | 2-4  | EX   | 3    | IM   | 2    | DI  | 2   | ID   | 2-4  | EX  | 3   |     |     |    |   |

Key to Table A-2

Opcode → 00 5 ← Number of HCS12 cycles (‡ indicates HC12 different)  
Mnemonic → BGND  
Address Mode → IH 1 ← Number of bytes

Table A-2. CPU12 Opcode Map (Sheet 2 of 2)

|       |      |       |     |       |    |     |    |        |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |    |
|-------|------|-------|-----|-------|----|-----|----|--------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|----|
| 00    | MOVW | 4     | 10  | 12    | 20 | 4   | 30 | 10     | 40   | 10   | 50   | 10   | 60   | 10   | 70   | 10   | 80   | 10   | 90   | 10   | A0   | 10   | B0   | 10   | C0   | 10   | D0   | 10   | E0   | 10   | F0   | 10 |
| IM-ID | 5    | IH    | 2   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 01    | MOVW | 5     | 11  | 12    | 21 | 3   | 31 | 10     | 41   | 10   | 51   | 10   | 61   | 10   | 71   | 10   | 81   | 10   | 91   | 10   | A1   | 10   | B1   | 10   | C1   | 10   | D1   | 10   | E1   | 10   | F1   | 10 |
| EX-ID | 5    | IH    | 2   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 02    | MOVW | 5     | 12  | 13    | 22 | 4/3 | 32 | 10     | 42   | 10   | 52   | 10   | 62   | 10   | 72   | 10   | 82   | 10   | 92   | 10   | A2   | 10   | B2   | 10   | C2   | 10   | D2   | 10   | E2   | 10   | F2   | 10 |
| ID-ID | 4    | EMACS | 4   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 03    | MOVW | 5     | 13  | 3     | 23 | 4/3 | 33 | 10     | 43   | 10   | 53   | 10   | 63   | 10   | 73   | 10   | 83   | 10   | 93   | 10   | A3   | 10   | B3   | 10   | C3   | 10   | D3   | 10   | E3   | 10   | F3   | 10 |
| IM-EX | 8    | IH    | 2   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 04    | MOVW | 8     | 14  | 12    | 24 | 4/3 | 34 | 10     | 44   | 10   | 54   | 10   | 64   | 10   | 74   | 10   | 84   | 10   | 94   | 10   | A4   | 10   | B4   | 10   | C4   | 10   | D4   | 10   | E4   | 10   | F4   | 10 |
| EX-EX | 8    | IH    | 2   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 05    | MOVW | 5     | 15  | 12    | 25 | 4/3 | 35 | 10     | 45   | 10   | 55   | 10   | 65   | 10   | 75   | 10   | 85   | 10   | 95   | 10   | A5   | 10   | B5   | 10   | C5   | 10   | D5   | 10   | E5   | 10   | F5   | 10 |
| ID-EX | 5    | IH    | 2   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 06    | ABA  | 2     | 16  | 2     | 26 | 4/3 | 36 | 10     | 46   | 10   | 56   | 10   | 66   | 10   | 76   | 10   | 86   | 10   | 96   | 10   | A6   | 10   | B6   | 10   | C6   | 10   | D6   | 10   | E6   | 10   | F6   | 10 |
| IH    | 2    | SBA   | 2   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 07    | DAA  | 3     | 17  | 2     | 27 | 4/3 | 37 | 10     | 47   | 10   | 57   | 10   | 67   | 10   | 77   | 10   | 87   | 10   | 97   | 10   | A7   | 10   | B7   | 10   | C7   | 10   | D7   | 10   | E7   | 10   | F7   | 10 |
| IH    | 2    | CBA   | 2   | RL    | 4  | IH  | 2  | TRAP   | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 08    | MOVW | 4     | 18  | 4-7   | 28 | 4/3 | 38 | 10     | 48   | 10   | 58   | 10   | 68   | 10   | 78   | 10   | 88   | 10   | 98   | 10   | A8   | 10   | B8   | 10   | C8   | 10   | D8   | 10   | E8   | 10   | F8   | 10 |
| IM-ID | 4    | ID    | 3-5 | MAXA  | 4  | RL  | 4  | IH     | 2    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 09    | MOVW | 5     | 19  | 4-7   | 29 | 4/3 | 39 | 10     | 49   | 10   | 59   | 10   | 69   | 10   | 79   | 10   | 89   | 10   | 99   | 10   | A9   | 10   | B9   | 10   | C9   | 10   | D9   | 10   | E9   | 10   | F9   | 10 |
| EX-ID | 5    | ID    | 3-5 | MINA  | 4  | RL  | 4  | IH     | 2    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 0A    | MOVW | 5     | 1A  | 4-7   | 2A | 4/3 | 3A | †3n    | 4A   | 10   | 5A   | 10   | 6A   | 10   | 7A   | 10   | 8A   | 10   | 9A   | 10   | AA   | 10   | BA   | 10   | CA   | 10   | DA   | 10   | EA   | 10   | FA   | 10 |
| ID-ID | 4    | ID    | 3-5 | EMAXD | 4  | RL  | 4  | SP     | 2    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 0B    | MOVW | 4     | 1B  | 4-7   | 2B | 4/3 | 3B | †5n/3n | 4B   | 10   | 5B   | 10   | 6B   | 10   | 7B   | 10   | 8B   | 10   | 9B   | 10   | AB   | 10   | BB   | 10   | CB   | 10   | DB   | 10   | EB   | 10   | FB   | 10 |
| IM-EX | 5    | ID    | 3-5 | EMIND | 4  | RL  | 4  | SP     | 2    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 0C    | MOVW | 8     | 1C  | 4-7   | 2C | 4/3 | 3C | †7B    | 4C   | 10   | 5C   | 10   | 6C   | 10   | 7C   | 10   | 8C   | 10   | 9C   | 10   | AC   | 10   | BC   | 10   | CC   | 10   | DC   | 10   | EC   | 10   | FC   | 10 |
| EX-EX | 8    | ID    | 3-5 | MAXM  | 4  | RL  | 4  | SP     | 2    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 0D    | MOVW | 5     | 1D  | D4-7  | 2D | 4/3 | 3D | †6     | 4D   | 10   | 5D   | 10   | 6D   | 10   | 7D   | 10   | 8D   | 10   | 9D   | 10   | AD   | 10   | BD   | 10   | CD   | 10   | DD   | 10   | ED   | 10   | FD   | 10 |
| ID-EX | 5    | ID    | 3-5 | MINM  | 4  | RL  | 4  | ID     | 3    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 0E    | TAB  | 2     | 1E  | 4-7   | 2E | 4/3 | 3E | †8     | 4E   | 10   | 5E   | 10   | 6E   | 10   | 7E   | 10   | 8E   | 10   | 9E   | 10   | AE   | 10   | BE   | 10   | CE   | 10   | DE   | 10   | EE   | 10   | FE   | 10 |
| IH    | 2    | ID    | 3-5 | EMAXM | 4  | RL  | 4  | IH     | 2    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |
| 0F    | TBA  | 2     | 1F  | 4-7   | 2F | 4/3 | 3F | 10     | 4F   | 10   | 5F   | 10   | 6F   | 10   | 7F   | 10   | 8F   | 10   | 9F   | 10   | AF   | 10   | BF   | 10   | CF   | 10   | DF   | 10   | EF   | 10   | FF   | 10 |
| IH    | 2    | ID    | 3-5 | EMINM | 4  | RL  | 4  | ID     | 3    | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP | TRAP |    |

\* The opcode \$04 (on sheet 1 of 2) corresponds to one of the loop primitive instructions DBEQ, DBNE, IBEQ, IBNE, TBEQ, or TBNE.

† Refer to instruction summary for more information.

‡ Refer to instruction summary for different HC12 cycle count.

Page 2: When the CPU encounters a page 2 opcode (\$18 on page 1 of the opcode map), it treats the next byte of object code as a page 2 instruction opcode.

Table A-3. Indexed Addressing Mode Postbyte Encoding (xb)

|    |                  |    |                   |    |                 |    |                  |    |                  |    |                   |    |                 |    |                  |    |                   |    |                    |    |                  |    |                   |    |                   |    |                    |    |                     |    |                      |
|----|------------------|----|-------------------|----|-----------------|----|------------------|----|------------------|----|-------------------|----|-----------------|----|------------------|----|-------------------|----|--------------------|----|------------------|----|-------------------|----|-------------------|----|--------------------|----|---------------------|----|----------------------|
| 00 | 0,X<br>5b const  | 10 | -16,X<br>5b const | 20 | 1,+X<br>pre-inc | 30 | 1,X+<br>post-inc | 40 | 0,Y<br>5b const  | 50 | -16,Y<br>5b const | 60 | 1,+Y<br>pre-inc | 70 | 1,Y+<br>post-inc | 80 | 0,SP<br>5b const  | 90 | -16,SP<br>5b const | A0 | 1,+SP<br>pre-inc | B0 | 1,SP+<br>post-inc | C0 | 0,PC<br>5b const  | D0 | -16,PC<br>5b const | E0 | n,X<br>9b const     | F0 | n,SP<br>9b const     |
| 01 | 1,X<br>5b const  | 11 | -15,X<br>5b const | 21 | 2,+X<br>pre-inc | 31 | 2,X+<br>post-inc | 41 | 1,Y<br>5b const  | 51 | -15,Y<br>5b const | 61 | 2,+Y<br>pre-inc | 71 | 2,Y+<br>post-inc | 81 | 1,SP<br>5b const  | 91 | -15,SP<br>5b const | A1 | 2,+SP<br>pre-inc | B1 | 2,SP+<br>post-inc | C1 | 1,PC<br>5b const  | D1 | -15,PC<br>5b const | E1 | -n,X<br>9b const    | F1 | -n,SP<br>9b const    |
| 02 | 2,X<br>5b const  | 12 | -14,X<br>5b const | 22 | 3,+X<br>pre-inc | 32 | 3,X+<br>post-inc | 42 | 2,Y<br>5b const  | 52 | -14,Y<br>5b const | 62 | 3,+Y<br>pre-inc | 72 | 3,Y+<br>post-inc | 82 | 2,SP<br>5b const  | 92 | -14,SP<br>5b const | A2 | 3,+SP<br>pre-inc | B2 | 3,SP+<br>post-inc | C2 | 2,PC<br>5b const  | D2 | -14,PC<br>5b const | E2 | n,X<br>16b const    | F2 | n,SP<br>16b const    |
| 03 | 3,X<br>5b const  | 13 | -13,X<br>5b const | 23 | 4,+X<br>pre-inc | 33 | 4,X+<br>post-inc | 43 | 3,Y<br>5b const  | 53 | -13,Y<br>5b const | 63 | 4,+Y<br>pre-inc | 73 | 4,Y+<br>post-inc | 83 | 3,SP<br>5b const  | 93 | -13,SP<br>5b const | A3 | 4,+SP<br>pre-inc | B3 | 4,SP+<br>post-inc | C3 | 3,PC<br>5b const  | D3 | -13,PC<br>5b const | E3 | [n,X]<br>16b indir  | F3 | [n,SP]<br>16b indir  |
| 04 | 4,X<br>5b const  | 14 | -12,X<br>5b const | 24 | 5,+X<br>pre-inc | 34 | 5,X+<br>post-inc | 44 | 4,Y<br>5b const  | 54 | -12,Y<br>5b const | 64 | 5,+Y<br>pre-inc | 74 | 5,Y+<br>post-inc | 84 | 4,SP<br>5b const  | 94 | -12,SP<br>5b const | A4 | 5,+SP<br>pre-inc | B4 | 5,SP+<br>post-inc | C4 | 4,PC<br>5b const  | D4 | -12,PC<br>5b const | E4 | A,X<br>A offset     | F4 | A,SP<br>A offset     |
| 05 | 5,X<br>5b const  | 15 | -11,X<br>5b const | 25 | 6,+X<br>pre-inc | 35 | 6,X+<br>post-inc | 45 | 5,Y<br>5b const  | 55 | -11,Y<br>5b const | 65 | 6,+Y<br>pre-inc | 75 | 6,Y+<br>post-inc | 85 | 5,SP<br>5b const  | 95 | -11,SP<br>5b const | A5 | 6,+SP<br>pre-inc | B5 | 6,SP+<br>post-inc | C5 | 5,PC<br>5b const  | D5 | -11,PC<br>5b const | E5 | B,X<br>B offset     | F5 | B,SP<br>B offset     |
| 06 | 6,X<br>5b const  | 16 | -10,X<br>5b const | 26 | 7,+X<br>pre-inc | 36 | 7,X+<br>post-inc | 46 | 6,Y<br>5b const  | 56 | -10,Y<br>5b const | 66 | 7,+Y<br>pre-inc | 76 | 7,Y+<br>post-inc | 86 | 6,SP<br>5b const  | 96 | -10,SP<br>5b const | A6 | 7,+SP<br>pre-inc | B6 | 7,SP+<br>post-inc | C6 | 6,PC<br>5b const  | D6 | -10,PC<br>5b const | E6 | D,X<br>D offset     | F6 | D,SP<br>D offset     |
| 07 | 7,X<br>5b const  | 17 | -9,X<br>5b const  | 27 | 8,+X<br>pre-inc | 37 | 8,X+<br>post-inc | 47 | 7,Y<br>5b const  | 57 | -9,Y<br>5b const  | 67 | 8,+Y<br>pre-inc | 77 | 8,Y+<br>post-inc | 87 | 7,SP<br>5b const  | 97 | -9,SP<br>5b const  | A7 | 8,+SP<br>pre-inc | B7 | 8,SP+<br>post-inc | C7 | 7,PC<br>5b const  | D7 | -9,PC<br>5b const  | E7 | [D,X]<br>D indirect | F7 | [D,SP]<br>D indirect |
| 08 | 8,X<br>5b const  | 18 | -8,X<br>5b const  | 28 | 8,-X<br>pre-dec | 38 | 8,X-<br>post-dec | 48 | 8,Y<br>5b const  | 58 | -8,Y<br>5b const  | 68 | 8,-Y<br>pre-dec | 78 | 8,Y-<br>post-dec | 88 | 8,SP<br>5b const  | 98 | -8,SP<br>5b const  | A8 | 8,-SP<br>pre-dec | B8 | 8,SP-<br>post-dec | C8 | 8,PC<br>5b const  | D8 | -8,PC<br>5b const  | E8 | n,Y<br>9b const     | F8 | n,PC<br>9b const     |
| 09 | 9,X<br>5b const  | 19 | -7,X<br>5b const  | 29 | 7,-X<br>pre-dec | 39 | 7,X-<br>post-dec | 49 | 9,Y<br>5b const  | 59 | -7,Y<br>5b const  | 69 | 7,-Y<br>pre-dec | 79 | 7,Y-<br>post-dec | 89 | 9,SP<br>5b const  | 99 | -7,SP<br>5b const  | A9 | 7,-SP<br>pre-dec | B9 | 7,SP-<br>post-dec | C9 | 9,PC<br>5b const  | D9 | -7,PC<br>5b const  | E9 | -n,Y<br>9b const    | F9 | -n,PC<br>9b const    |
| 0A | 10,X<br>5b const | 1A | -6,X<br>5b const  | 2A | 8,-X<br>pre-dec | 3A | 8,X-<br>post-dec | 4A | 10,Y<br>5b const | 5A | -6,Y<br>5b const  | 6A | 8,-Y<br>pre-dec | 7A | 8,Y-<br>post-dec | 8A | 10,SP<br>5b const | 9A | -6,SP<br>5b const  | AA | 8,-SP<br>pre-dec | BA | 8,SP-<br>post-dec | CA | 10,PC<br>5b const | DA | -6,PC<br>5b const  | EA | n,Y<br>16b const    | FA | n,PC<br>16b const    |
| 0B | 11,X<br>5b const | 1B | -5,X<br>5b const  | 2B | 5,-X<br>pre-dec | 3B | 5,X-<br>post-dec | 4B | 11,Y<br>5b const | 5B | -5,Y<br>5b const  | 6B | 5,-Y<br>pre-dec | 7B | 5,Y-<br>post-dec | 8B | 11,SP<br>5b const | 9B | -5,SP<br>5b const  | AB | 5,-SP<br>pre-dec | BB | 5,SP-<br>post-dec | CB | 11,PC<br>5b const | DB | -5,PC<br>5b const  | EB | [n,Y]<br>16b indir  | FB | [n,PC]<br>16b indir  |
| 0C | 12,X<br>5b const | 1C | -4,X<br>5b const  | 2C | 4,-X<br>pre-dec | 3C | 4,X-<br>post-dec | 4C | 12,Y<br>5b const | 5C | -4,Y<br>5b const  | 6C | 4,-Y<br>pre-dec | 7C | 4,Y-<br>post-dec | 8C | 12,SP<br>5b const | 9C | -4,SP<br>5b const  | AC | 4,-SP<br>pre-dec | BC | 4,SP-<br>post-dec | CC | 12,PC<br>5b const | DC | -4,PC<br>5b const  | EC | A,Y<br>A offset     | FC | A,PC<br>A offset     |
| 0D | 13,X<br>5b const | 1D | -3,X<br>5b const  | 2D | 3,-X<br>pre-dec | 3D | 3,X-<br>post-dec | 4D | 13,Y<br>5b const | 5D | -3,Y<br>5b const  | 6D | 3,-Y<br>pre-dec | 7D | 3,Y-<br>post-dec | 8D | 13,SP<br>5b const | 9D | -3,SP<br>5b const  | AD | 3,-SP<br>pre-dec | BD | 3,SP-<br>post-dec | CD | 13,PC<br>5b const | DD | -3,PC<br>5b const  | ED | B,Y<br>B offset     | FD | B,PC<br>B offset     |
| 0E | 14,X<br>5b const | 1E | -2,X<br>5b const  | 2E | 2,-X<br>pre-dec | 3E | 2,X-<br>post-dec | 4E | 14,Y<br>5b const | 5E | -2,Y<br>5b const  | 6E | 2,-Y<br>pre-dec | 7E | 2,Y-<br>post-dec | 8E | 14,SP<br>5b const | 9E | -2,SP<br>5b const  | AE | 2,-SP<br>pre-dec | BE | 2,SP-<br>post-dec | CE | 14,PC<br>5b const | DE | -2,PC<br>5b const  | EE | D,Y<br>D offset     | FE | D,PC<br>D offset     |
| 0F | 15,X<br>5b const | 1F | -1,X<br>5b const  | 2F | 1,-X<br>pre-dec | 3F | 1,X-<br>post-dec | 4F | 15,Y<br>5b const | 5F | -1,Y<br>5b const  | 6F | 1,-Y<br>pre-dec | 7F | 1,Y-<br>post-dec | 8F | 15,SP<br>5b const | 9F | -1,SP<br>5b const  | AF | 1,-SP<br>pre-dec | BF | 1,SP-<br>post-dec | CF | 16,PC<br>5b const | DF | -1,PC<br>5b const  | EF | [D,Y]<br>D indirect | FF | [D,PC]<br>D indirect |

Key to Table A-3




Table A-5. Transfer and Exchange Postbyte Encoding

| TRANSFERS |     |                                        |                                        |                                            |                                            |                         |                                      |                                      |                                        |
|-----------|-----|----------------------------------------|----------------------------------------|--------------------------------------------|--------------------------------------------|-------------------------|--------------------------------------|--------------------------------------|----------------------------------------|
| ↓LS       | MS⇒ | 0                                      | 1                                      | 2                                          | 3                                          | 4                       | 5                                    | 6                                    | 7                                      |
| 0         |     | A ⇒ A                                  | B ⇒ A                                  | CCR ⇒ A                                    | TMP3 <sub>L</sub> ⇒ A                      | B ⇒ A                   | X <sub>L</sub> ⇒ A                   | Y <sub>L</sub> ⇒ A                   | SP <sub>L</sub> ⇒ A                    |
| 1         |     | A ⇒ B                                  | B ⇒ B                                  | CCR ⇒ B                                    | TMP3 <sub>L</sub> ⇒ B                      | B ⇒ B                   | X <sub>L</sub> ⇒ B                   | Y <sub>L</sub> ⇒ B                   | SP <sub>L</sub> ⇒ B                    |
| 2         |     | A ⇒ CCR                                | B ⇒ CCR                                | CCR ⇒ CCR                                  | TMP3 <sub>L</sub> ⇒ CCR                    | B ⇒ CCR                 | X <sub>L</sub> ⇒ CCR                 | Y <sub>L</sub> ⇒ CCR                 | SP <sub>L</sub> ⇒ CCR                  |
| 3         |     | sex:A ⇒ TMP2                           | sex:B ⇒ TMP2                           | sex:CCR ⇒ TMP2                             | TMP3 ⇒ TMP2                                | D ⇒ TMP2                | X ⇒ TMP2                             | Y ⇒ TMP2                             | SP ⇒ TMP2                              |
| 4         |     | sex:A ⇒ D<br>SEX A,D                   | sex:B ⇒ D<br>SEX B,D                   | sex:CCR ⇒ D<br>SEX CCR,D                   | TMP3 ⇒ D                                   | D ⇒ D                   | X ⇒ D                                | Y ⇒ D                                | SP ⇒ D                                 |
| 5         |     | sex:A ⇒ X<br>SEX A,X                   | sex:B ⇒ X<br>SEX B,X                   | sex:CCR ⇒ X<br>SEX CCR,X                   | TMP3 ⇒ X                                   | D ⇒ X                   | X ⇒ X                                | Y ⇒ X                                | SP ⇒ X                                 |
| 6         |     | sex:A ⇒ Y<br>SEX A,Y                   | sex:B ⇒ Y<br>SEX B,Y                   | sex:CCR ⇒ Y<br>SEX CCR,Y                   | TMP3 ⇒ Y                                   | D ⇒ Y                   | X ⇒ Y                                | Y ⇒ Y                                | SP ⇒ Y                                 |
| 7         |     | sex:A ⇒ SP<br>SEX A,SP                 | sex:B ⇒ SP<br>SEX B,SP                 | sex:CCR ⇒ SP<br>SEX CCR,SP                 | TMP3 ⇒ SP                                  | D ⇒ SP                  | X ⇒ SP                               | Y ⇒ SP                               | SP ⇒ SP                                |
| EXCHANGES |     |                                        |                                        |                                            |                                            |                         |                                      |                                      |                                        |
| ↓LS       | MS⇒ | 8                                      | 9                                      | A                                          | B                                          | C                       | D                                    | E                                    | F                                      |
| 0         |     | A ⇔ A                                  | B ⇔ A                                  | CCR ⇔ A                                    | TMP3 <sub>L</sub> ⇔ A<br>\$00:A ⇔ TMP3     | B ⇔ A<br>A ⇔ B          | X <sub>L</sub> ⇔ A<br>\$00:A ⇔ X     | Y <sub>L</sub> ⇔ A<br>\$00:A ⇔ Y     | SP <sub>L</sub> ⇔ A<br>\$00:A ⇔ SP     |
| 1         |     | A ⇔ B                                  | B ⇔ B                                  | CCR ⇔ B                                    | TMP3 <sub>L</sub> ⇔ B<br>\$FF:B ⇔ TMP3     | B ⇔ B<br>\$FF ⇔ A       | X <sub>L</sub> ⇔ B<br>\$FF:B ⇔ X     | Y <sub>L</sub> ⇔ B<br>\$FF:B ⇔ Y     | SP <sub>L</sub> ⇔ B<br>\$FF:B ⇔ SP     |
| 2         |     | A ⇔ CCR                                | B ⇔ CCR                                | CCR ⇔ CCR                                  | TMP3 <sub>L</sub> ⇔ CCR<br>\$FF:CCR ⇔ TMP3 | B ⇔ CCR<br>\$FF:CCR ⇔ D | X <sub>L</sub> ⇔ CCR<br>\$FF:CCR ⇔ X | Y <sub>L</sub> ⇔ CCR<br>\$FF:CCR ⇔ Y | SP <sub>L</sub> ⇔ CCR<br>\$FF:CCR ⇔ SP |
| 3         |     | \$00:A ⇔ TMP2<br>TMP2 <sub>L</sub> ⇔ A | \$00:B ⇔ TMP2<br>TMP2 <sub>L</sub> ⇔ B | \$00:CCR ⇔ TMP2<br>TMP2 <sub>L</sub> ⇔ CCR | TMP3 ⇔ TMP2                                | D ⇔ TMP2                | X ⇔ TMP2                             | Y ⇔ TMP2                             | SP ⇔ TMP2                              |
| 4         |     | \$00:A ⇔ D                             | \$00:B ⇔ D                             | \$00:CCR ⇔ D<br>B ⇔ CCR                    | TMP3 ⇔ D                                   | D ⇔ D                   | X ⇔ D                                | Y ⇔ D                                | SP ⇔ D                                 |
| 5         |     | \$00:A ⇔ X<br>X <sub>L</sub> ⇔ A       | \$00:B ⇔ X<br>X <sub>L</sub> ⇔ B       | \$00:CCR ⇔ X<br>X <sub>L</sub> ⇔ CCR       | TMP3 ⇔ X                                   | D ⇔ X                   | X ⇔ X                                | Y ⇔ X                                | SP ⇔ X                                 |
| 6         |     | \$00:A ⇔ Y<br>Y <sub>L</sub> ⇔ A       | \$00:B ⇔ Y<br>Y <sub>L</sub> ⇔ B       | \$00:CCR ⇔ Y<br>Y <sub>L</sub> ⇔ CCR       | TMP3 ⇔ Y                                   | D ⇔ Y                   | X ⇔ Y                                | Y ⇔ Y                                | SP ⇔ Y                                 |
| 7         |     | \$00:A ⇔ SP<br>SP <sub>L</sub> ⇔ A     | \$00:B ⇔ SP<br>SP <sub>L</sub> ⇔ B     | \$00:CCR ⇔ SP<br>SP <sub>L</sub> ⇔ CCR     | TMP3 ⇔ SP                                  | D ⇔ SP                  | X ⇔ SP                               | Y ⇔ SP                               | SP ⇔ SP                                |


TMP2 and TMP3 registers are for factory use only.



**Table A-6. Loop Primitive Postbyte Encoding (1b)**

|    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |    |    |          |
|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|----|----|----------|
| 00 | A  | DBEQ (+) | 10 | A  | DBEQ (-) | 20 | A  | DBNE (+) | 30 | A  | DBNE (-) | 40 | A  | TBEQ (+) | 50 | A  | TBEQ (-) | 60 | A  | TBNE (+) | 70 | A  | TBNE (-) | 80 | A  | IBEQ (+) | 90 | A  | IBEQ (-) | A0 | A  | IBNE (+) | B0 | A  | IBNE (-) |
| 01 | B  | DBEQ (+) | 11 | B  | DBEQ (-) | 21 | B  | DBNE (+) | 31 | B  | DBNE (-) | 41 | B  | TBEQ (+) | 51 | B  | TBEQ (-) | 61 | B  | TBNE (+) | 71 | B  | TBNE (-) | 81 | B  | IBEQ (+) | 91 | B  | IBEQ (-) | A1 | B  | IBNE (+) | B1 | B  | IBNE (-) |
| 02 |    | —        | 12 |    | —        | 22 |    | —        | 32 |    | —        | 42 |    | —        | 52 |    | —        | 62 |    | —        | 72 |    | —        | 82 |    | —        | A2 |    | —        | B2 |    | —        |    |    |          |
| 03 |    | —        | 13 |    | —        | 23 |    | —        | 33 |    | —        | 43 |    | —        | 53 |    | —        | 63 |    | —        | 73 |    | —        | 83 |    | —        | A3 |    | —        | B3 |    | —        |    |    |          |
| 04 | D  | DBEQ (+) | 14 | D  | DBEQ (-) | 24 | D  | DBNE (+) | 34 | D  | DBNE (-) | 44 | D  | TBEQ (+) | 54 | D  | TBEQ (-) | 64 | D  | TBNE (+) | 74 | D  | TBNE (-) | 84 | D  | IBEQ (+) | 94 | D  | IBEQ (-) | A4 | D  | IBNE (+) | B4 | D  | IBNE (-) |
| 05 | X  | DBEQ (+) | 15 | X  | DBEQ (-) | 25 | X  | DBNE (+) | 35 | X  | DBNE (-) | 45 | X  | TBEQ (+) | 55 | X  | TBEQ (-) | 65 | X  | TBNE (+) | 75 | X  | TBNE (-) | 85 | X  | IBEQ (+) | 95 | X  | IBEQ (-) | A5 | X  | IBNE (+) | B5 | X  | IBNE (-) |
| 06 | Y  | DBEQ (+) | 16 | Y  | DBEQ (-) | 26 | Y  | DBNE (+) | 36 | Y  | DBNE (-) | 46 | Y  | TBEQ (+) | 56 | Y  | TBEQ (-) | 66 | Y  | TBNE (+) | 76 | Y  | TBNE (-) | 86 | Y  | IBEQ (+) | 96 | Y  | IBEQ (-) | A6 | Y  | IBNE (+) | B6 | Y  | IBNE (-) |
| 07 | SP | DBEQ (+) | 17 | SP | DBEQ (-) | 27 | SP | DBNE (+) | 37 | SP | DBNE (-) | 47 | SP | TBEQ (+) | 57 | SP | TBEQ (-) | 67 | SP | TBNE (+) | 77 | SP | TBNE (-) | 87 | SP | IBEQ (+) | 97 | SP | IBEQ (-) | A7 | SP | IBNE (+) | B7 | SP | IBNE (-) |

**Key to Table A-6**

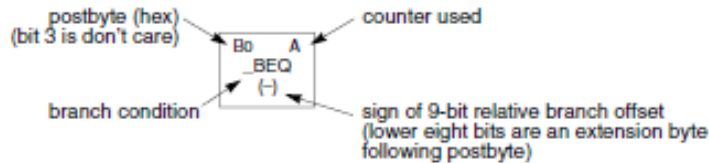

**Table A-7. Branch/Complementary Branch**

| Branch   |          |        |                 | Complementary Branch |          |        |               |
|----------|----------|--------|-----------------|----------------------|----------|--------|---------------|
| Test     | Mnemonic | Opcode | Boolean         | Test                 | Mnemonic | Opcode | Comment       |
| r>m      | BGT      | 2E     | Z + (N ⊕ V) = 0 | r≤m                  | BLE      | 2F     | Signed        |
| r≥m      | BGE      | 2C     | N ⊕ V = 0       | r<m                  | BLT      | 2D     | Signed        |
| r=m      | BEQ      | 27     | Z = 1           | r≠m                  | BNE      | 26     | Signed        |
| r≤m      | BLE      | 2F     | Z + (N ⊕ V) = 1 | r>m                  | BGT      | 2E     | Signed        |
| r<m      | BLT      | 2D     | N ⊕ V = 1       | r≥m                  | BGE      | 2C     | Signed        |
| r>m      | BHI      | 22     | C + Z = 0       | r≤m                  | BLS      | 23     | Unsigned      |
| r≥m      | BHS/BCC  | 24     | C = 0           | r<m                  | BLO/BCS  | 25     | Unsigned      |
| r=m      | BEQ      | 27     | Z = 1           | r≠m                  | BNE      | 26     | Unsigned      |
| r≤m      | BLS      | 23     | C + Z = 1       | r>m                  | BHI      | 22     | Unsigned      |
| r<m      | BLO/BCS  | 25     | C = 1           | r≥m                  | BHS/BCC  | 24     | Unsigned      |
| Carry    | BCS      | 25     | C = 1           | No Carry             | BCC      | 24     | Simple        |
| Negative | BMI      | 2B     | N = 1           | Plus                 | BPL      | 2A     | Simple        |
| Overflow | BVS      | 29     | V = 1           | No Overflow          | BVC      | 28     | Simple        |
| r=0      | BEQ      | 27     | Z = 1           | r≠0                  | BNE      | 26     | Simple        |
| Always   | BRA      | 20     | —               | Never                | BRN      | 21     | Unconditional |

For 16-bit offset long branches precede opcode with a \$18 page prebyte.